



Altair Series: Down Lighting

PAR 30 and 38


PAR 30

Specifications

Base:	E26, E27
Voltage:	AC 85-265V
Lighting Angle:	30 - 60 degrees
Lifespan:	50,000 hours
Operating Temp:	14° to 95°F, or -10° to 35°C
Color Temp:	
Warm White	2600°-3700°K
Day White	5000°-7000°K
Warranty:	2 Years

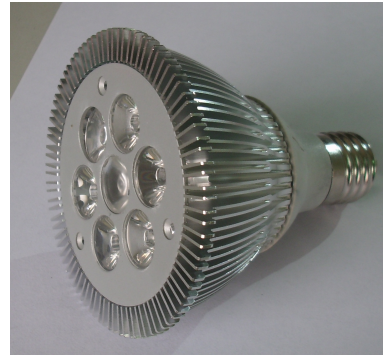

PAR 38

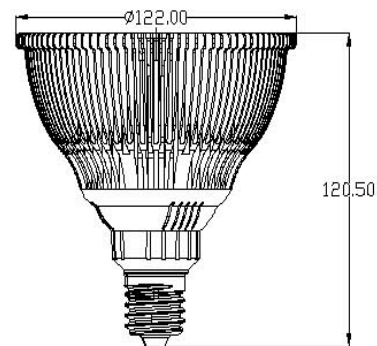

Specification subject to change without notice.
See website for latest version.

Features

- Aluminum heat sink
- No Ultraviolet (UV) interference
- No Radio Frequency (RF) interference
- Patented heat sink & optical diffuser
- Longer life than incandescent & fluorescents
- Solid State Lighting (SSL)
- Vibration resistant
- Instant Start
- No ballast required
- Mercury free
- Wide voltage
- Constant current
- High shock
- Quiet, no noise
- No flickering

All products are ETL certified and in accordance with CE, UL and FCC testing standards.

GreenCircleLights Inc
70-40 137th Street
Flushing, NY 11367

Main: 917-817-3389
Sales: 917-373-3022



Altair Series: LED Down Lighting

Options and Specifications

	PAR 30 (Dimable)	PAR 30 (Non-dimable)	PAR 38 (Dimable)	PAR 38 (Non-dimable)
Catalog No.	GCL-FPAR30-7x1W-001	GCL-FPAR30-7x1W-002	GCL-FPAR38-9X1.2W-001	GCL-FPAR38-12X1.2W-002
Wattage	7	7	12	15
Input voltage	AC 85V-265V	AC 85V-265V	AC 85V-265V	AC 85V-265V
Light output (Lumens)	400LM	400LM	700LM	700LM
LED Count	7 LEDs	7 LEDs	9 LEDs	12 LEDs
Lighting Angle	30 - 60°			
LED Engine Manufacturer	CREE			
Lens Type	PMMA			
Color Temps Available	Warm White: 2600°- 3700° K / Daylight White: 5000°- 7000° K			
Operating Temp	14° to 95°F, or -10° to 35°C			
Base / Fitting Type	E26, E27			
CRI	80 (Typical)			
Drive Type	Epistar			
Construction	Impact resistant plastic & Integrated heat sink			
Efficiency Rating	0..92			
Lifespan - 70% Lumen MTBF	50,000 Hrs			
Power Factor	0.85			
Safety Grade	IP60			
Warranty	2 Years			
Diameter	94.5mm	94.5mm	121.6mm	121.6mm
Net Weight (g)	236	236	460	470
Shipping Box Weight (kg)	0.26	0.26	0.51	0.51
Shipping Box Size (cm)	51.5*51.5*22	51.5*51.5*22	70*30*29	70*30*29
# per Shipping Box	50	50	20	20