


## Pollux Series: Household Lights

80 / 150 LED


### Specifications

Base:	E26/E27/B22
Voltage:	AC 120V
Lighting Angle:	180 degrees
Lifespan:	50,000 hours
Operating Temp:	14° to 95°F, or -10° to 35°C
Color Temp:	
Warm White	2600°-3700°K
Natural White	4000°-4800°K
Day White	5000°-6500°K
Cool White	6500°-7500°K
Warranty:	2 Years

### 80 LED

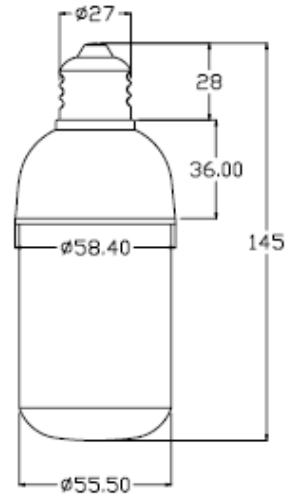

### 150 LED

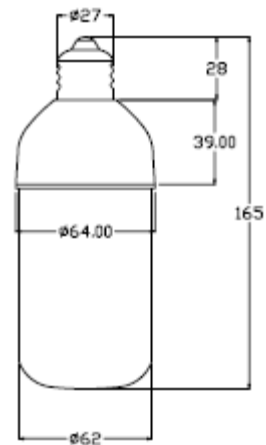

Specification subject to change without notice.  
See website for latest version.

### Features

- Aluminum heat sink
- No Ultraviolet (UV) interference
- No Radio Frequency (RF) interference
- Patented heat sink & optical diffuser
- Longer life than incandescent & fluorescents
- Solid State Lighting (SSL)
- Vibration resistant
- Instant Start
- No ballast required
- Mercury free
- Wide voltage
- Constant current
- High shock
- Quiet, no noise
- No flickering

All products are ETL certified and in accordance with CE, UL and FCC testing standards.

**GreenCircleLights Inc**  
70-40 137th Street  
Flushing, NY 11367

Main: 917-817-3389  
Sales: 917-373-3022



# Pollux Series: LED Household Lights

## Options and Specifications

	LED 80 (Dimable)	LED 81 (Non-Dimable)	LED 150 (Dimable)	LED 151 (Non-Dimable)
<b>Catalog No.</b>	GCL-FP60-80LED-001	GCL-FP60-81LED-002	GCL-FP60-150LED-001	GCL-FP60-150LED-002
<b>Wattage</b>	4.5	4.5	7.5	7.5
<b>Input voltage</b>	AC 120V	AC 120V	AC 120V	AC 120V
<b>Light output (Lumens)</b>	300LM	300LM	500LM	500LM
<b>LED Count</b>	80 LEDs	81 LEDs	150 LEDs	151 LEDs
<b>Lighting Angle</b>	180°			
<b>LED Engine Manufacturer</b>	CREE			
<b>Lens Type</b>	no lens			
<b>Color Temps Available</b>	<b>Warm White:</b> 2600°- 3700° K / <b>Natural White:</b> 4000°- 4800°K <b>Daylight White:</b> 5000°- 6500° K / <b>Cool White:</b> 6500°- 7500°K			
<b>Operating Temp</b>	14° to 95°F, or -10° to 35°C			
<b>Base / Fitting Type</b>	E26/E27	E26/E27	E26/E27/B22	E26/E27/B22
<b>Central Lux</b>	30 Lux / 3m	30 Lux / 3m	40 Lux / 3m	40 Lux / 3m
<b>CRI</b>	80			
<b>Drive Type</b>	Epistar			
<b>Construction</b>	Impact resistant plastic & Integrated heat sink			
<b>Efficiency Rating</b>	0.86			
<b>Lifespan - 70% Lumen MTBF</b>	50,000 Hrs			
<b>Power Factor</b>	0.85			
<b>Safety Grade</b>	IP60			
<b>Warranty</b>	2 Years			
<b>Diameter</b>	55.5mm			
<b>Net Weight (g)</b>	107	107	148	148
<b>Shipping Box Weight (kg)</b>	0.143	0.143	0.195	0.195
<b>Shipping Box Size (cm)</b>	36*36*37	36*36*37	40*39*42	40*39*42
<b># per Shipping Box</b>	50	50	50	50