

Sirius Series: High Power Spotlights

Multi-Spots

Specifications

Base: MR-16, GU10, E26 / E27

Lifespan: 50,000 hours

Operating Temp: 14° to 95°F, or -10° to 35°C


Color Temp:

Warm White 2600°-3700°K


Day White 5000°-7000°K

Warranty: 2 Years


MR-16

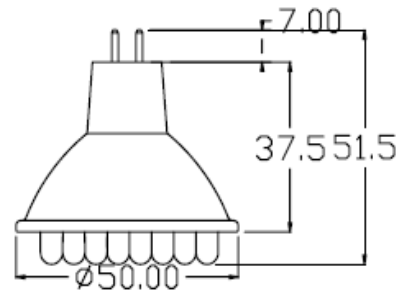

GU10

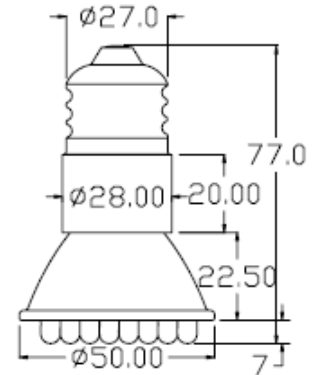

E26 / E27

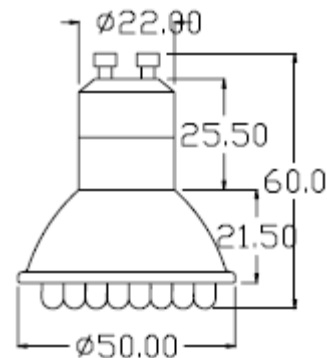

Specification subject to change without notice.
See website for latest version.

Features

- Aluminum heat sink
- No Ultraviolet (UV) interference
- No Radio Frequency (RF) interference
- Patented heat sink & optical diffuser
- Longer life than incandescent & fluorescents
- Solid State Lighting (SSL)
- Vibration resistant
- Instant Start
- No ballast required
- Mercury free
- Wide voltage
- Constant current
- High shock
- Quiet, no noise
- No flickering

All products are ETL certified and in accordance with CE, UL and FCC testing standards.

GreenCircleLights Inc
70-40 137th Street
Flushing, NY 11367

Main: 917-817-3389
Sales: 917-373-3022



Sirius Series: High Power Spotlights

Options and Specifications

	MR16 24 LED	MR16 48 LED	GU10 48 LED	E27 48 LED
Catalog No.	GCL-FMR16-24LED-001	GCL-FRM16-48LED-001	GCL-GU10-48LED-001	GCL-E27-48LED-001
Wattage	1.3 W	2 W	2 W	2W
Input voltage	AC/DC 12V AC 9 – 16V	AC 9 – 16V	AC 120V/220V	AC 120V/220V
Light output (Lumens)	80LM	150LM	150LM	150LM
LED Count	24	48	48	48
Lighting Angle	60°			
LED Engine Manufacturer	CREE			
Lens Type	PMMA			
Color Temps Available	Warm White: 2600°- 3700° K / Daylight White: 5000°- 7000° K			
Operating Temp	14° to 95°F, or -10° to 35°C			
Base / Fitting Type	MR16	MR16	GU10	E26 / E27
CRI	80 (Typical)			
Drive Type	Epistar			
Construction	Impact resistant plastic & Integrated heat sink			
Efficiency Rating	0.91			
Lifespan - 70% Lumen MTBF	50,000 Hrs			
power factor	0.85			
Safety Grade	IP60			
Warranty	2 Years			
Diameter	50MM			
Net Weight (g)	42	42	54	72
Shipping Box Weight (kg)	0.057	0.057	0.069	0.072
Shipping Box Size (cm)	65*29*17.5	65*29*17.5	65*29*17.5	29*29*18.5
# per Shipping Box	100			