

Sirius Series: High Power Spotlights

Single Spot

Specifications

Base: MR-16, GU10, E26/E27

Voltage:

E26/E27, GU10 AC 85-265V

MR-16 AC/DC 12V

Lumen: 120LM

Lighting Angle: 30 - 60 degrees

Lifespan: 50,000 hours

Operating Temp: 14° to 95°F, or -10° to 35°C


Color Temp:

Warm White 2600°-3700°K


Day White 5000°-7000°K

Warranty: 2 Years


MR-16

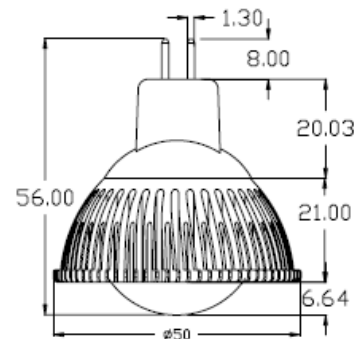

GU10



E26 / E27

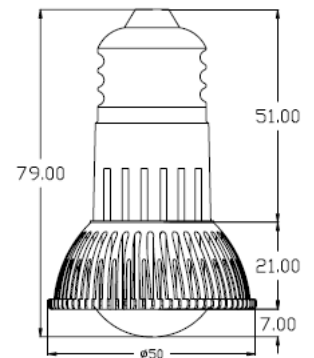

Specification subject to change without notice.
See website for latest version.

Features

- Aluminum heat sink
- No Ultraviolet (UV) interference
- No Radio Frequency (RF) interference
- Patented heat sink & optical diffuser
- Longer life than incandescent & fluorescents
- Solid State Lighting (SSL)
- Vibration resistant
- Instant Start
- No ballast required
- Mercury free
- Wide voltage
- Constant current
- High shock
- Quiet, no noise
- No flickering

All products are ETL certified and in accordance with CE, UL and FCC testing standards.

GreenCircleLights Inc
70-40 137th Street
Flushing, NY 11367

Main: 917-817-3389
Sales: 917-373-3022



Sirius Series: High Power Spotlights

Options and Specifications

	Single Spot MR16	Single Spot GU10	Single Spot E27
Catalog No.	GCL-FMR16-1X3W-001	GCL-GU10-1X3W-001	GCL-E27-1X3W-001
Wattage	1.3		
Input voltage	AC/DC 12V	AC 85V-265V	AC 85V-265V
Light output (Lumens)	120LM		
LED Count	1 LED		
Lighting Angle	30 - 60°		
LED Engine Manufacturer	CREE		
Lens Type	PMMA		
Color Temps Available	Warm White: 2600°- 3700° K / Daylight White: 5000°- 7000° K		
Operating Temp	14° to 95°F, or -10° to 35°C		
Base / Fitting Type	MR16	GU10	E26 / E27
CRI	80 (Typical)		
Drive Type	Epistar		
Construction	Impact resistant plastic & Integrated heat sink		
Efficiency Rating	0.92	0.92	0.92
Lifespan- 70% Lumen MTBF	50,000 Hrs		
Power Factor	0.85		
Safety Grade	IP64		
Warranty	2 Years		
Diameter	50MM		
Net Weight (g)	52	67.5	82.5
Shipping Box Weight (kg)	0.067	0.825	0.975
Shipping Box Size (cm)	5*5*6.5	5*5*6.5	5*5*6.5
# per Shipping Box	100	100	100