

Vega Series: LED Panels

Specifications

Voltage: AC 100-277V

Lighting Angle: 160 degrees

Lifespan: 50,000 hours

Operating Temp: 14° to 95°F, or -10° to 35°C

Warranty: 2 Years




Color Temp:

Warm White 3000°-3500°K

Natural White 4000°-4500°K

Day White 5800°-6300°K

Cool White 7000°-7500°K

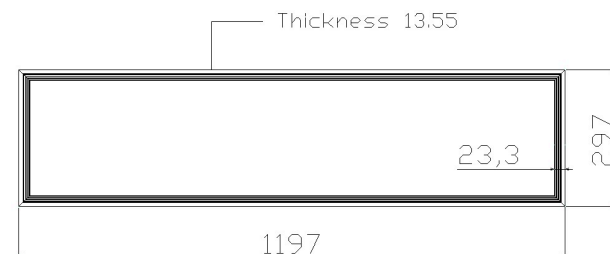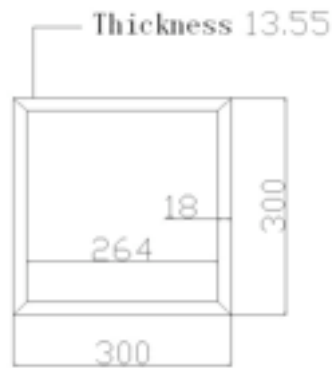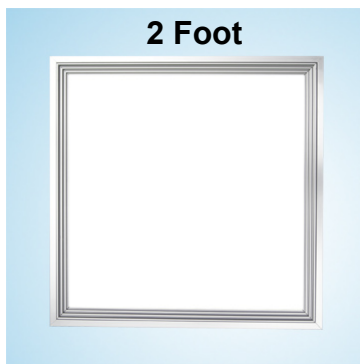

GreenCircleLight's LED Tube fixtures must be installed by a qualified electrician. It is the responsibility of the contractor, installer, purchaser, owner, and user to install, maintain, and operate the fixture in such a manner as to comply with all state and local laws, ordinances, regulations, and the American National Standards Institute Safety Code. Specification subject to change without notice. See website for latest version.

Features

- Aluminum heat sink
- No Ultraviolet (UV) interference
- No Radio Frequency (RF) interference
- Patented heat sink & optical diffuser
- Longer life than incandescent & fluorescents
- Solid State Lighting (SSL)
- Vibration resistant
- Instant Start
- No ballast required
- Mercury free
- Wide voltage
- Constant current
- High shock
- Quiet, no noise
- No flickering

All products are ETL certified and in accordance with CE, UL and FCC testing standards.

GreenCircleLights Inc
70-40 137th Street
Flushing, NY 11367

Main: 917-817-3389
Sales: 917-373-3022

Vega Series: LED Panels

Options and Specifications

	2 Foot (60 cm)	4 Foot (120 cm)	5 Foot (150cm)
Catalog No.	GCL-FCLQ30-15W-001	GCL-FCLQ60-24W-001	GCL-FCLQ30*120-30W-001
Wattage	15	24	30
Input voltage	AC100-277V	AC100-277V	AC100-277V
Light output (Lumens)	1000LM	2000LM	2800LM
LED Count	240LEDS	408LEDS	510LEDS
Lighting Angle	160°		
LED Engine Manufacturer	IWATT		
Lens Type	PMMA		
Color Temps Available	Warm White: 3000° - 3500° K / Natural White: 4000° - 4500°K / Daylight White: 5800° - 6300° K / Cool White: 7000° - 7500°K		
Operating Temp	14° to 95°F or -10° to 35°C		
Base / Fitting Type	60LUX/3M	60LUX/3M	60LUX/3M
CRI	80 (Typical)		
Drive Type	epistar		
Construction	Impact resistant plastic & Integrated heat sink		
Efficiency Rating	0.93		
Lifespan- 70% Lumen MTBF	50,000 Hrs		
Power Factor	0.9		
Safety Grade	60		
Warranty	2 Years		
Diameter	300mm	595mm	1197mm
Net Weight	1.42	5.8	6.8
Shipping Box Weight (kg)	0.5	0.6	0.7
Shipping Box Size (cm)	360x360x45	660x660x45	360x1260x45
# per Shipping Box	1	1	1