
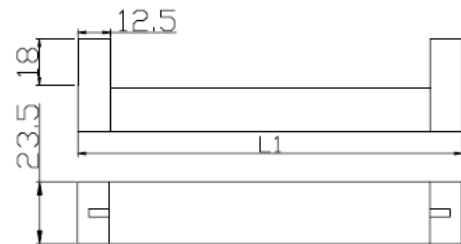



LED T5 Tube

Available in 1', 2', 3', 4' and 5' lengths.

Specifications

Base:	T5
Voltage:	AC 85-265V
Lighting Angle:	160 degrees
Lifespan:	50,000 hours
Operating Temp:	14° to 95°F, or -10° to 35°C
Color Temp:	
Warm White	2600°-3700°K
Day White	5000°-7000°K
Warranty:	3 years

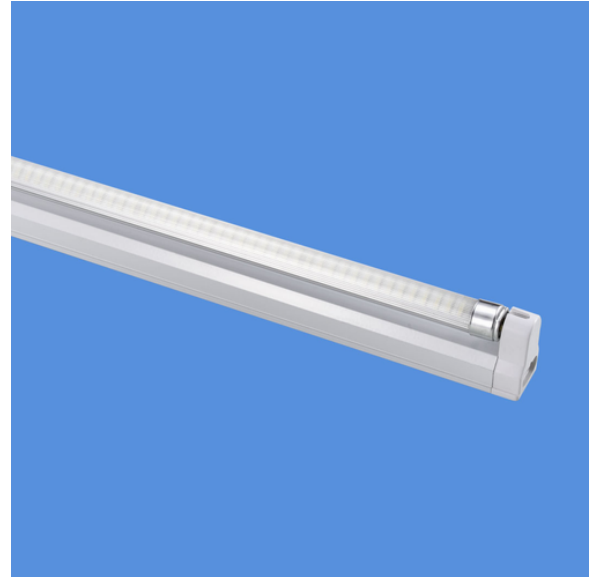

Features

- Aluminum heat sink
- No Ultraviolet (UV) interference
- No Radio Frequency (RF) interference
- Patented heat sink & optical diffuser
- Longer life than incandescent & fluorescents
- Solid State Lighting (SSL)
- Vibration resistant
- Instant Start
- No ballast required
- Mercury free
- Wide voltage
- Constant current
- High shock
- Quiet, no noise
- No flickering

All products are ETL certified and in accordance with CE, UL and FCC testing standards.

GreenCircleLights Inc
70-40 137th Street
Flushing, NY 11367

Main: 917-817-3389
Sales: 917-373-3022



LED T5 Tube Options

	1 Foot (30 cm)	2 Foot (60 cm)	3 Foot (90 cm)	4 Foot (120cm)	5 Foot (150 cm)
Catalog No.	GCL-FT5-5W-001	GCL-FT5-9W-001	GCL-FT5-11W-001	GCL-FT5-16W-001	GCL-FT5-18W-001
Wattage	5	9	11	16	18
Replaces	15W T5 Fluorescent	25W T5 Fluorescent	35W T5 Fluorescent	45W T5 Fluorescent	55W T5 Fluorescent
Input voltage	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V
Light output (Lumens)	450LM	800LM	1100LM	1200LM	1500LM
LED Count	60 SMD LEDs	120 SMD LEDs	150 SMD LEDs	210 LEDs	270 SMDLEDs
Lighting Angle	160				
LED Engine Manufacturer	CREE				
Lens Type	Clear or Frosted				
Color Temps Available	Warm White: 2600°- 3700° K / Daylight White: 5000°- 7000° K				
Operating Temp	14° to 95°F or -10° to 35°C				
Base / Fitting Type	T5				
Central Lux	50 Lux/3m	50 Lux/3m	60 Lux/3m	60 Lux/3m	60 Lux/3m
CRI	80 (Typical)				
Drive Type	Isolated and Constant				
Construction	Impact resistant plastic & Integrated heat sink				
Efficiency Rating	90LM/W	89LM/W	100LM/W	75LM/W	83.3LM/W
Lifespan- 70% Lumen MTBF	50,000 Hrs				
Power Factor	0.9				
Safety Grade	IP64				
Warranty	3 Year				
Diameter	3cm				
Net Weight	0.21kg	0.35kg	0.46kg	0.59kg	0.74kg
Shipping Box Weight (kg)	0.565	0.78	0.97	1.17	1.475
Shipping Box Size (cm)	360*250*235	665*250*235	970*250*235	1570*250*235	1860*190*190
# per Shipping Box	25				